

Product Information

GKL-025..050G / M

Flow Meter GKL



- Large, easily visible scale
- Set-point indicator
- Optionally switching output

Characteristics

A float moves in a transparent conical measurement tube, relative to the flow. The position of the float depends on the volume flow (weight force versus resistance to flow), and indicates the flow rate on the scaled measurement tube.

Technical data

Switch	optional reed switch	
Nominal width	DN 25..50	
Process connection	malleable cast iron, female thread Rp 1 "...Rp 2 " PVC glue socket Ø32..63	
Metering range	1.3..4150 l/min	for details see table "Ranges"
Q _{max.}	to 4150 l/min	
Tolerance	±3 % of full scale value	
Pressure resistance	malleable cast iron PN 15 bar PVC PN 10 bar	
Medium temperature	malleable cast iron -20..+60 °C optionally 5..100 °C measurement tube made from PSU PVC 5..60 °C	
Ambient temperature	malleable cast iron -20..+60 °C PVC 5..60 °C	
Media	water, gases	
Electrical data	see "Additional devices for GK / GKL"	

Materials medium-contact	<i>malleable cast iron connection:</i> PA 6-3-T, malleable cast iron, Viton float made from PP or 1.4571 optionally, measurement tube made from PSU	<i>PVC connection:</i> PA 6-3-T, PVC, Viton float made from PP or 1.4571 optionally, measurement tube made from PSU
Non-medium-contact materials	PA	
Weight	see table "Dimensions and weights"	
Installation location	vertical inwards flow from below	

Ranges

●=Standard ○=Optional

Medium water / float PP

The details in the table correspond to a vertical inwards flow from below.

	Metering range l/h	Magnet		Type
		without	with	
DN 25 Rp 1 "	100 - 1000	●		GKL-025.TW1000PO
			○	GKL-025.TW1000PM
		●		GKL-032.TW1000PO
			○	GKL-032.TW1000PM
DN 32 Rp 1 1/4 "	150 - 1600	●		GKL-032.TW1600PO
			○	GKL-032.TW1600PM
		●		GKL-040.TW1600PO
			○	GKL-040.TW1600PM
	200 - 2500	●		GKL-040.TW2500PO
			○	GKL-040.TW2500PM
	300 - 3300	●		GKL-040.TW3300PO
			○	GKL-040.TW3300PM
DN 50 Rp 2 "	200 - 2500	●		GKL-050.TW2500PO
			○	GKL-050.TW2500PM
	400 - 4000	●		GKL-050.TW4000PO
			○	GKL-050.TW4000PM
	600 - 6400	●		GKL-050.TW6400PO
			○	GKL-050.TW6400PM

Medium water / float stainless steel

The details in the table correspond to a vertical inwards flow from below.

	Metering range l/h	Magnet		Type
		without	with	
DN 25 Rp 1 "	100 - 1000	○		GKL-025.TW1000KO
			○	GKL-025.TW1000KM
DN 32 Rp 1 1/4 "	150 - 1600	○		GKL-032.TW1500KO
			○	GKL-032.TW1500KM
DN 40 Rp 1 1/2 "	300 - 2500	○		GKL-040.TW2500KO
			○	GKL-040.TW2500KM
DN 50 Rp 2 "	400 - 4000	○		GKL-050.TW4000KO
			○	GKL-050.TW4000KM
	600 - 6400	○		GKL-050.TW6400KO
			○	GKL-050.TW6400KM

... professional Instruments "MADE IN GERMANY"

Product Information

GKL-025..050G / M

Medium air / float PP

The details in the table correspond to a vertical inwards flow from below, with the medium at a temperature of 0 °C and a pre-pressure of 1.013 bar.

Rp	Metering range m³/h	Magnet		Type
		without	with	
DN 25 Rp 1 "	1 - 10	○		GKL-025.TL0100PO
	1.25 - 10		○	GKL-025.TL0100PM
	1.5 - 16	○		GKL-025.TL0160PO
			○	GKL-025.TL0160PM
DN 32 Rp 1 1/4 "	3 - 25		○	GKL-025.TL0250PM
	1.5 - 16	○		GKL-032.TL0160PO
	2 - 25	○		GKL-032.TL0250PO
	4 - 40	○		GKL-032.TL0400PO
			○	GKL-032.TL0400PM
DN 40 Rp 1 1/2 "	6 - 64		○	GKL-032.TL0640PM
	2 - 25	○		GKL-040.TL0250PO
	4 - 40	○		GKL-040.TL0400PO
	5 - 50	○		GKL-040.TL0500PO
	5 - 60		○	GKL-040.TL0600PM
DN 50 Rp 2 "	4 - 40	○		GKL-050.TL0400PO
	5 - 65	○		GKL-050.TL0640PO
	10 - 100	○		GKL-050.TL1000PO
	15 - 160		○	GKL-050.TL1600PM
	20 - 250		○	GKL-050.TL2500PM


Dimensions and weights

Connection malleable, cast iron female thread

Rp	Types	L	L1	G	SW	X	Weight kg
Rp 1 "	GKL-025G..	402	350	G 1 1/2	55	17	0.8
Rp 1 1/4 "	GKL-032G..	410	350	G 2	66	19	1.3
Rp 1 1/2 "	GKL-040G..	414	350	G 2 1/4	74	20	1.8
Rp 2 "	GKL-050G..	420	350	G 2 3/4	90	24	2.4

Connection PVC, glue socket

DN	Types	d	G	L	L1	X	D	Weight kg
25	GKL-025M..	32	G 1 1/2	400	350	17	60	0.4
32	GKL-032M..	40	G 2	408	350	19	74	0.8
40	GKL-040M..	50	G 2 1/4	418	350	20	83	1.1
50	GKL-050M..	63	G 2 3/4	433	350	24	103	1.5

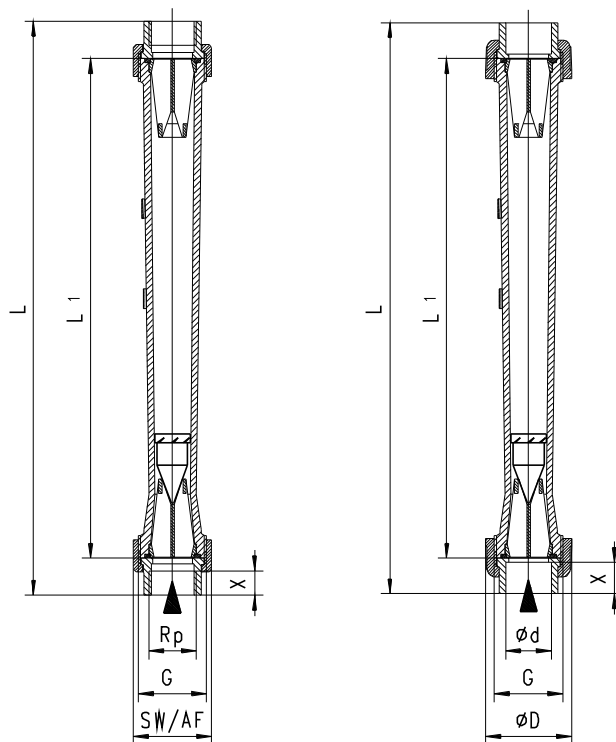

Product Information

GKL-025..050G / M

Handling and operation

- Include straight calming section of 5 x DN in inlet and outlet
- If the media are dirty, install a filter (use magnetic filter for ferritic components).
- It must be ensured that the values given for voltage, current, and power are not exceeded.
- When switched on, a load must be connected in series.
- The electrical details apply to ohmic loads. Capacitive, inductive and lamp loads must be operated using a protective circuit.
- Pay attention to the operating temperature/pressure

		Pressure range in bar			
Connection		malleable cast iron		PVC	
Measurement tube		PA 6-3-T	PSU	PA 6-3-T	PSU
Temperature °C	-20	15.0	-	-	-
	-10	15.0	-	-	-
	0	15.0	-	-	-
	5	15.0	-	10.0	-
	10	15.0	-	10.0	-
	20	15.0	-	10.0	-
	25	15.0	-	10.0	-
	30	13.5	15.0	8.0	-
	40	12.0	13.0	6.0	-
	50	10.7	12.0	3.5	-
	60	9.5	11.0	1.5	-
	70	-	9.7	-	-
	80	-	8.5	-	-
	90	-	7.7	-	-
	100	-	6.0	-	-

Ordering code

GKL - 1. 2. 3. 4. 5.

●=Standard ○=Option

1. Nominal width									
025	DN 25 - Rp 1 " or Ø32								
032	DN 32 - Rp 1 1/4 " or Ø40								
040	DN 32 - Rp 1 1/2 " or Ø50								
050	DN 50 - Rp 2 " or Ø63								
3. Process connection									
G	female thread, Rp made from malleable cast iron								
M	screw connection with glue socket made of PVC								
3. Switching current tube									
T	PA 6-3-T								
P	PSU								
4. Display range H ₂ O for vertical inwards flow									
W1000	100 - 1000 l/h	●	○						●
W1600	150 - 1600 l/h	●	○	○	○				●
		●	○	○	○				●
W2500	200 - 2500 l/h	●	○			●	●		
	300 - 2500 l/h			○	○		○		
W3300	300 - 3300 l/h	●	○					●	
W4000	400 - 4000 l/h	●	○	○	○	●			
W6400	600 - 6400 l/h	●	○	○	○	●			

Display range air (0 °C 1.013 bar abs.) for vertical inwards flow									
L0100	1.00 - 10 m³/h	○							○
	1.25 - 10 m³/h		○						○
L0160	1.50 - 16 m³/h	○	○						○
		○							○
L0250	2.00 - 25 m³/h	○					○	○	
	3.00 - 25 m³/h		○						○
L0400	4.00 - 40 m³/h	○	○					○	
		○					○	○	
L0500	5.00 - 50 m³/h	○						○	
L0600	5.00 - 60 m³/h		○					○	
L0640	6.00 - 64 m³/h		○						○
		○						○	
L1000	10.00 - 100 m³/h	○						○	
L1600	15.00 - 160 m³/h		○					○	
L2500	20.00 - 250 m³/h		○					○	
5. Float									
PO	PP								
PM	PP with magnet								
KO	stainless steel								
KM	stainless steel with magnet								

Options

- Metering ranges and special scales under defined operating pressures / temperatures

Accessories

- GKEH-1251 / GKEL-1252
- GKK-1270
- GKI-1272

Ordering information

- Specify direction of flow, medium, and display range.
- For gases, state pressure (relative or absolute), temperature and medium (e.g. air) (request display range)

... professional Instruments "MADE IN GERMANY"